



VIBROTOR® High-Frequency Pneumatic Vibrator

*This simple, long-lasting **VIBROTOR® High-Frequency Pneumatic Vibrator** provides effective high-frequency vibration at an economical price. Apply to hoppers, bins, railcars, chutes, molds, screens, and tables to keep materials flowing as they should. Also great for use in pre-cast concrete applications.*



*CCR VIBROTOR®
Vibrator with
Standard Cradle
Lug Bracket*

BENEFITS

- **Unique**
Generates multiple vibrations on each orbit.
- **Bearing-Free Design**
Eliminates wear problems and extends service life.
- **Portable or Permanent Mount**
Portable mount CCR models have mounting options for weldable cradle lug brackets, cradle lug weld mounts, or cradle lug clamp mounts. DVR models have bolt holes for direct mounting.

SPECIFICATIONS

Model	P/N	Unbalance lb-in. / kg-mm	
CCR-4400	29725	0.441	5.1
DVR-5500	14156	1.262	14.5
CCR-5500	28848	1.262	14.5
DVR-6500	14153	2.344	27.0
CCR-6500	29905	2.344	27.0

PERFORMANCE DATA

Model	20 psi (1.38 bar)			40 psi (2.76 bar)			60 psi (4.14 bar)			80 psi (5.52 bar)			Max. lb (kg) material in slope of bin*
	Speed VPM	Force lb (kg)	Flow cfm (L/min)	Speed VPM	Force lb (kg)	Flow cfm (L/min)	Speed VPM	Force lb (kg)	Flow cfm (L/min)	Speed VPM	Force lb (kg)	Flow cfm (L/min)	
CCR-4400	7200	649 (294)	35 (991)	11,500	1655 (751)	53 (1501)	13,500	2281 (1035)	65 (1841)	15,000	2816 (1277)	73 (2067)	28,160 (12,773)
DVR-5500	6600	1560 (708)	32 (906)	10,000	3582 (1625)	42 (1189)	12,500	5596 (2538)	55 (1558)	14,000	7020 (3184)	58 (1643)	70,200 (31,843)
CCR-5500	6600	1560 (708)	32 (906)	10,000	3582 (1625)	42 (1189)	12,500	5596 (2538)	55 (1558)	14,000	7020 (3184)	58 (1643)	70,200 (31,843)
DVR-6500	5800	2238 (1015)	25 (708)	8500	4806 (2180)	35 (991)	10,700	7616 (3455)	44 (1246)	12,500	10,395 (4716)	50 (1416)	103,950 (47,152)
CCR-6500	5800	2238 (1015)	25 (708)	8500	4806 (2180)	35 (991)	10,700	7616 (3455)	44 (1246)	12,500	10,395 (4716)	50 (1416)	103,950 (47,152)

* **Rule-of-thumb vibrator sizing:** One pound of vibrator force for every ten pounds of product in the sloped section of the bin content. Mount vibrator as close as possible to material outlet. Reinforce mount area to prevent flexure of bin wall at mount location.

DIMENSIONS - IN.

Model	A	B	C	D	E	F	G	H*	J**	K‡
CCR-4400	7.17	5.51	6.89	N/A	3.54	2.50	N/A	N/A	N/A	0.50
DVR-5500	10.00	7.37	6.50	4 Holes 2.76 x 7.87	5.50	4.13	0.75	0.69	4	0.50
CCR-5500	9.63	9.50	6.75	N/A	3.15	4.13	N/A	N/A	N/A	0.50
DVR-6500	10.00	7.37	6.50	4 holes 2.76 x 7.87	5.50	4.13	0.75	0.69	4	0.50
CCR-6500	9.63	9.50	6.75	N/A	3.15	4.13	N/A	N/A	N/A	0.50


*Bolt size.

**Quantity of bolts Required

‡ Hose I.D. Size


DVR-5500, 6500

CCR-5500, 6500

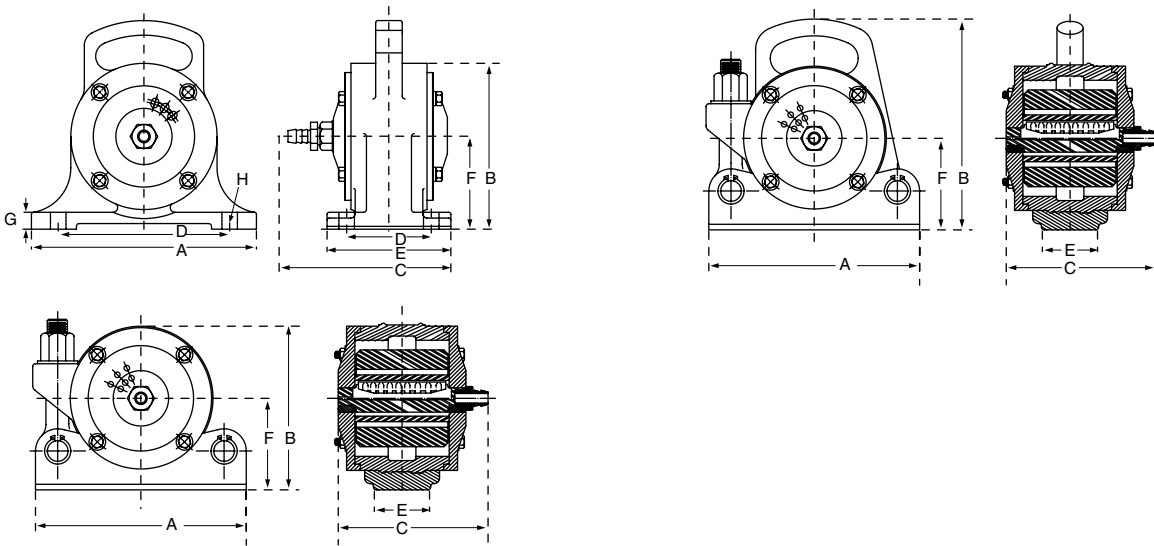

VIBROTOR® CRADLE LUG MOUNTS

Model	Wedge Mount	Clamp Mount	Standard
CCR-4400	n/a	n/a	29734
CCR-5500	29551	22817	28732
CCR-6500	29551	22817	28732

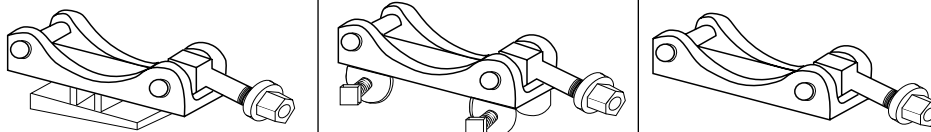

Patents and patents pending. © Registered trademark of Martin Engineering Company in the U.S. and other select locations. Additional information can be obtained at www.martin-eng.com/trademarks.

**QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV**



MARTIN ENGINEERING USA
One Martin Place
Neponset, IL 61345-9766 USA
800-544-2947 or 309-594-2384
FAX: 309-594-2432
www.martin-eng.com